WITHERBY
COLLECTION

INSTALLATION GUIDE

STEP 1

GLASS DOORS

Slide plastic bushing onto the threaded rod

Insert threaded rod into the door, ensuring the plastic bushing is centred in the door.

WOOD DOORS

Insert threaded rod into the door

- **No plastic bushing required**
- **For single sided installation see STEP 3**

PREPARATION

Door requires two ½” holes (13mm)

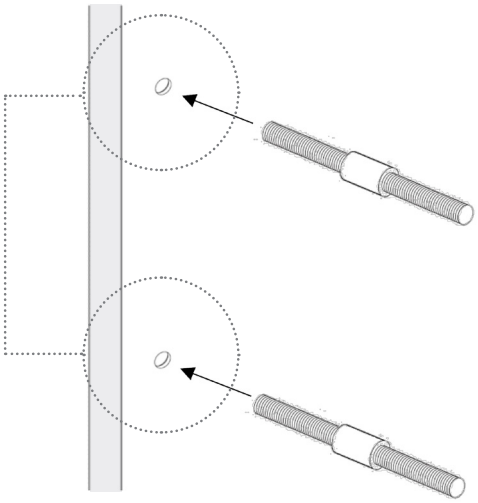

STEP 2

GLASS DOORS

Slide the nylon washer over the threaded rod, and flush to against the door.

WOOD DOORS

Plastic washer not required

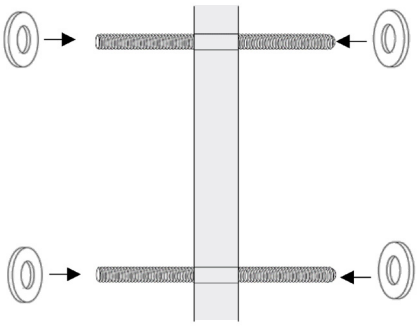

STEP 3

GLASS AND WOOD DOORS

Screw the fixing snub onto the threaded bolt, and tightly secure it until flush with the nylon washer/door.

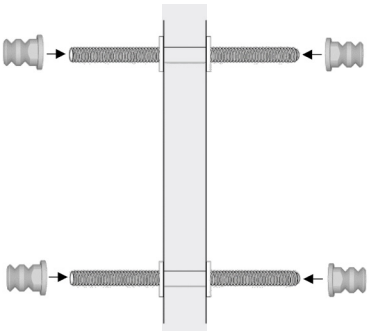

SINGLE SIDED FIXING

Install the fixing snubs directly onto the door with wood screws

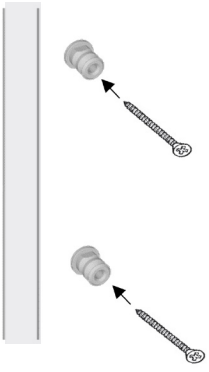

STEP 4

Slide the pull handle onto the fixing snubs.

Firmly tighten the grub screws on the top and bottom of the pull handle

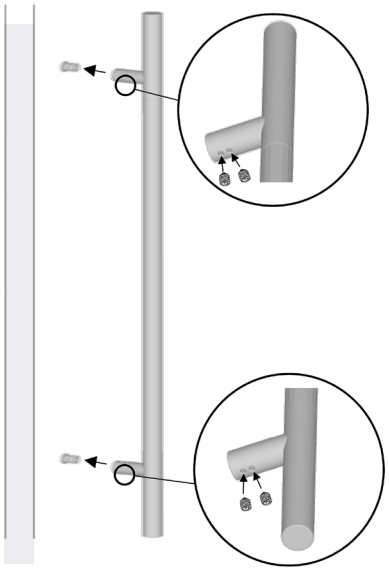

CARE INSTRUCTIONS

METAL SURFACES:

To clean the metal surfaces of the pull handle, use a soft damp cloth and rub gently.
Never use any kind of chemical detergents or abrasive cleaning materials.

LEATHER SURFACES:

For general cleaning, gently rub a soft dry cloth along the leather's surface. Stains can be initially treated with a damp cloth, and with a neutral soap for more resistant stains.