





PG330 SYSTEM



PG-330 SYSTEM KEY FEATURES

- Improved soft-close (PureSoft) device utilizing gas in place of springs
- Increased system weight capacity of 330lbs
- Header track which accomodates a hydraulic patch fitting for swing doors
- Ease of installations. No pre-assembly required within header track prior to mount
- ADA compliant per lbs. of force used to operate
- Available in 2 series based on budget and required features
- EN testing over 100,000 cycles

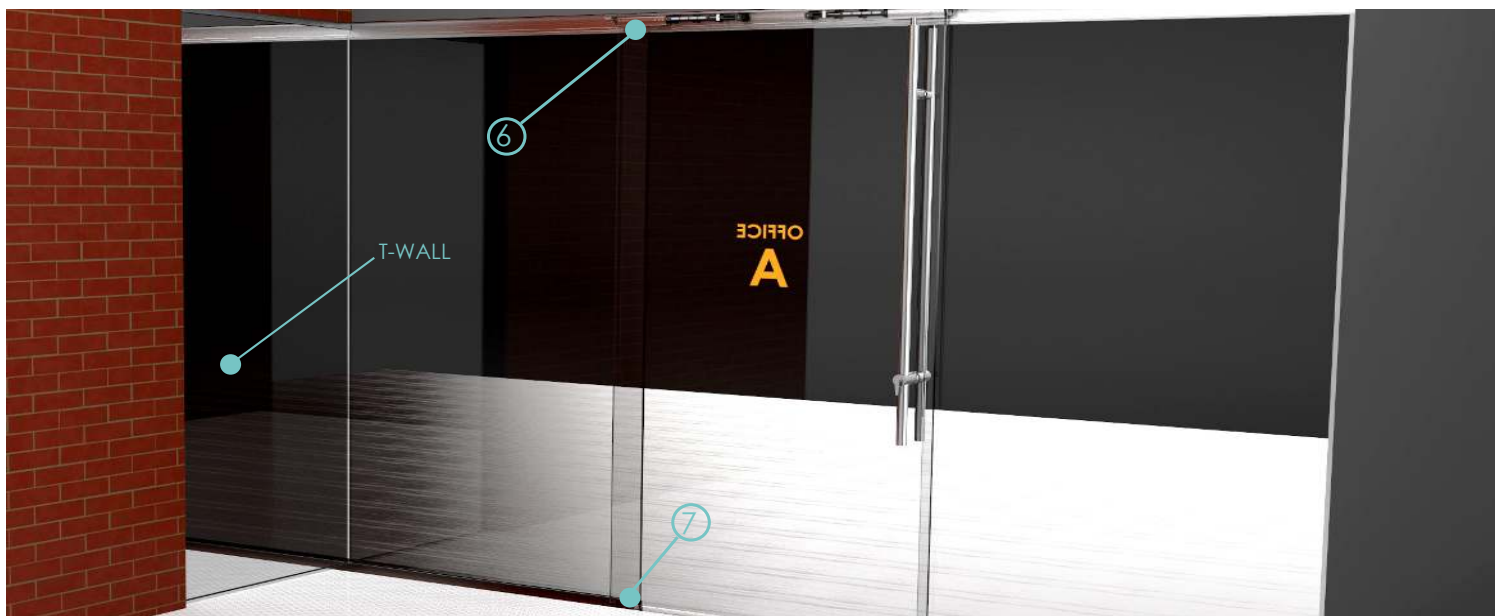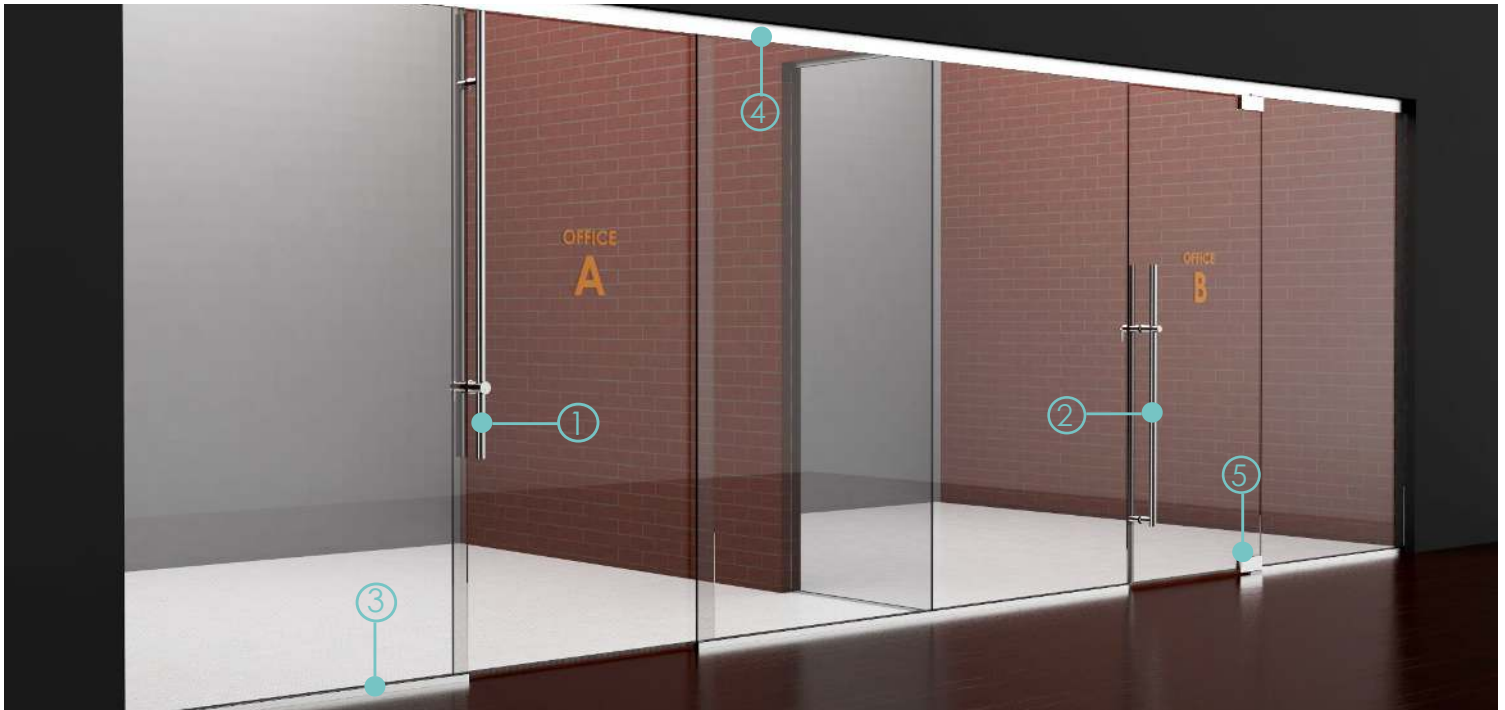

Rev 03- 0919

1



LLNSP TOP LOCKING HANDLE
ADA COMPLIANT
BRUSHED STAINLESS STEEL
SFIC OR LFIC HOUSING (CORRIDOR SIDE)
108DEG 2-1/4" LEVER TURN (INSIDE)

2




URHD STAGGERED LOCKING HANDLE
ADA COMPLIANT
BRUSHED STAINLESS STEEL
SFIC OR LFIC HOUSING (CORRIDOR SIDE)
108DEG 2-1/4" LEVER TURN (INSIDE)

3




ANODIZED ALUMINUM BOTTOM TRACK
ACCOMMODATE FIXED GLASS PANELS
BLACK/GREY GASKETS

4




ANODIZED ALUMINUM TOP TRACK
ACCOMMODATE FIXED & SLIDING GLASS
BLACK/GREY GASKETS

5



HYDRAULIC-ASSIST AUTO PATCH HINGES


6



CLAMP ASSEMBLY INCLUDES

- STOP/RETAINER ASSEMBLY
- SHOCK ABSORBER
- CLAMP BODY
- GAS ASSIST SOFT CLOSE (PURESOFT)
- SOFT CLOSE TRIGGER

7



SLIDING DOOR FLOOR GUIDE



TYPICAL INSTALLATIONS

OFFICE A FEATURES:

- Anodized aluminum bottom track
- Anodized aluminum top track
- Clamp assembly with soft close device
- Floor guide
- ADA compliant top locking handle with supplied SFIC or LFIC lock housing

OFFICE B FEATURES:

- Anodized aluminum bottom track
- Anodized aluminum top track
- Pivot hydraulic-assist Auto Patch hinges
- ADA compliant, staggered bottom locking handle with supplied SFIC or LFIC lock housing

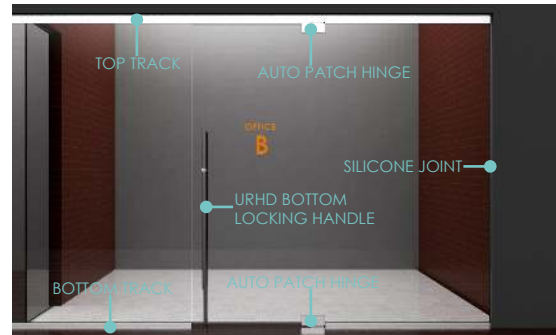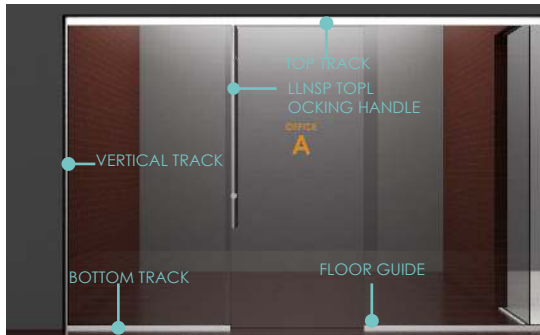


FLOOR GUIDE



VERTICAL TRACK




AUTO PATCH HINGE

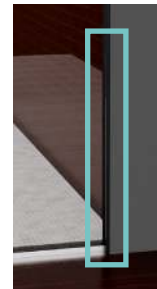


SIDE WITH SILICONE JOINT

TRACK DETAILS

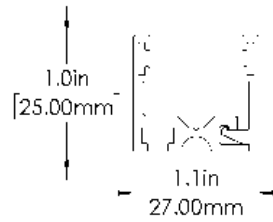


Bottom Track

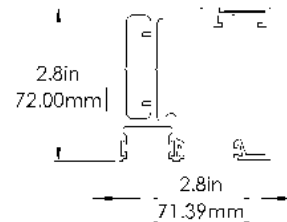

Top Track

CLAMP CONFIGURATION OPTIONS

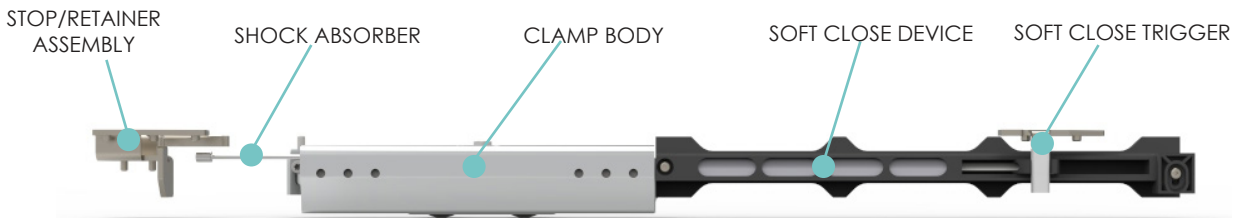

OPTION A

- STOP/RETAINER ASSEMBLY
- SHOCK ABSORBER
- CLAMP BODY
- SOFT CLOSE DEVICE(PURESOFT)
- SOFT CLOSE TRIGGER



OPTION B

- STOP/RETAINER ASSEMBLY
- SHOCK ABSORBER
- CLAMP BODY



HANDLE OPTIONS


- All handles are available in standard sizes or custom sizes
- Material: 304 S.S.
- Finish: Polished, brushed, matte black, bronze
- Locking options: Thumb turn, lever turn, SFIC or LFIC housing
- Locking position: bottom locking, top locking
- ADA or non-ADA design
- XP series is non-locking handle



XP



LP



LLNSP



URHD

(Universal Rim Housing Design)